


¿Cómo se configura mi dispositivo Bluebird de control de acceso?

Añadir un nuevo dispositivo de control de acceso en la configuración SecuTix

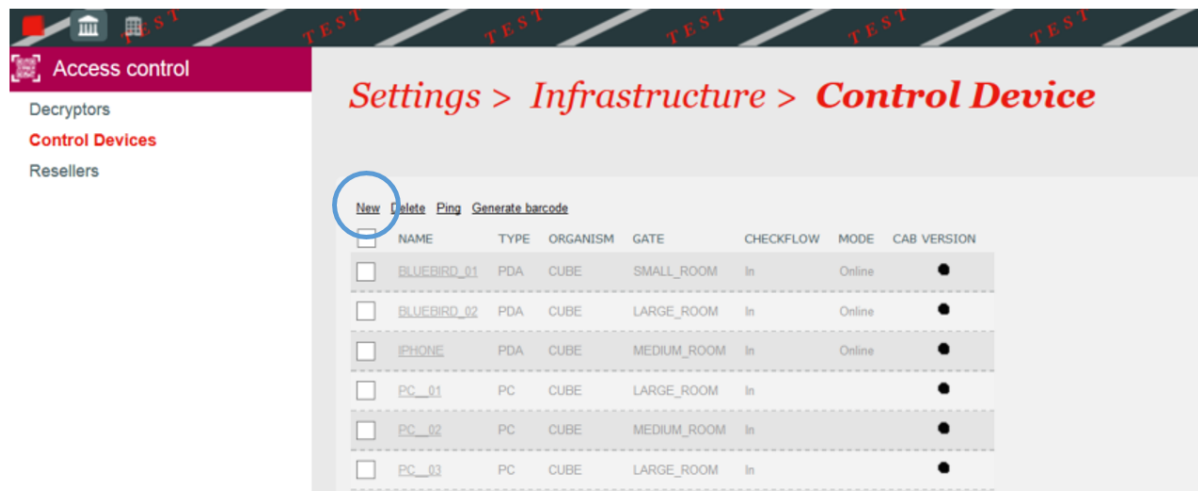

Después, rellene los campos de la siguiente forma:

- la primera parte (New Control Device) con códigos del organismo, la institución y el tipo: PDA y el nombre del dispositivo.
- la segunda parte (Infrastructure configuration) contiene únicamente la información útil para las antiguas PDAs. Introduzca la información de los campos obligatorios; no es necesario que estos campos estén correctos.
- la tercera parte (PDA user interface) contiene la información útil principalmente para las antiguas PDAs. Sin embargo, es necesario añadir los componentes gráficos que desee para su cliente de control de acceso (interface elements). Nosotros le recomendamos que añada todos los elementos de la lista de la derecha.

Una vez que ha añadido la configuración, podrá generar un código QR que le facilitará la recogida de datos del cliente.

Una vez que ha añadido la configuración, podrá generar un código QR que le facilitará la recogida de datos del cliente.

Access control

Decryptors

Control Devices

Resellers

Item 1 - 22

■ Login and password for generate barcode

Login: CUBE_CUBE_DEMO

Password:

GENERATE BARCODE

NAME	TYPE	ORGANISM	GATE	CHECKFLOW	MODE	CAB VERSION
BLUEBIRD_01	PD	CUBE	SMALL_ROOM	In	Online	●
BLUEBIRD_02	PD	CUBE	LARGE_ROOM	In	Online	●
PHONE	PD	CUBE	MEDIUM_ROOM	In	Online	●
PC_01	PC	CUBE	LARGE_ROOM	In		●
PC_02	PC	CUBE	MEDIUM_ROOM	In		●
PC_03	PC	CUBE	LARGE_ROOM	In		●
PC_04	PC	CUBE	VISIT	In		●
PC_05	PC	CUBE	TEST	In		●
PC_06	PC	CUBE	AMPHITHEATRE	In		●
PDA_07	PDA	CUBE	LARGE_ROOM	In	Online	●
PDA_08	PDA	CUBE	LARGE_ROOM	In	Online	●
PDA_09	PDA	CUBE	LARGE_ROOM	In	Online	●
PDA_10	PDA	CUBE	MEDIUM_MIX	In	Online	●
PDA_11	PDA	CUBE	MEDIUM_MIX	In	Online	●
PDA_12	PDA	CUBE	MEDIUM_MIX	In	Online	●
PDA_13	PDA	CUBE	MEDIUM_MIX	In	Online	●
PDA_14	PDA	CUBE	MEDIUM_ROOM	In	Online	●
PDA_15	PDA	CUBE	MEDIUM_ROOM	In	Online	●
PDA_16	PDA	CUBE	SMALL_ROOM	In	Online	●
PDA_17	PDA	CUBE	STUDIO	In	Online	●
TEST_01	PDA	CUBE	LARGE_ROOM	In	Online	●
TEST_02	PDA	CUBE	VISIT	In	Online	●

Access control

Decryptors

Control Devices

Resellers

Settings > Infrastructure > Control Device


BLUEBIRD_01




Configurar el aparato de control de acceso.

Durante el primer uso del dispositivo, tendrá que introducir y aplicar una configuración válida. Antes de comenzar, compruebe que tiene acceso a la red (Wi-Fi o datos) en el dispositivo de control de acceso.


Pase la primera pantalla clicando en la tecla «GET STARTED».

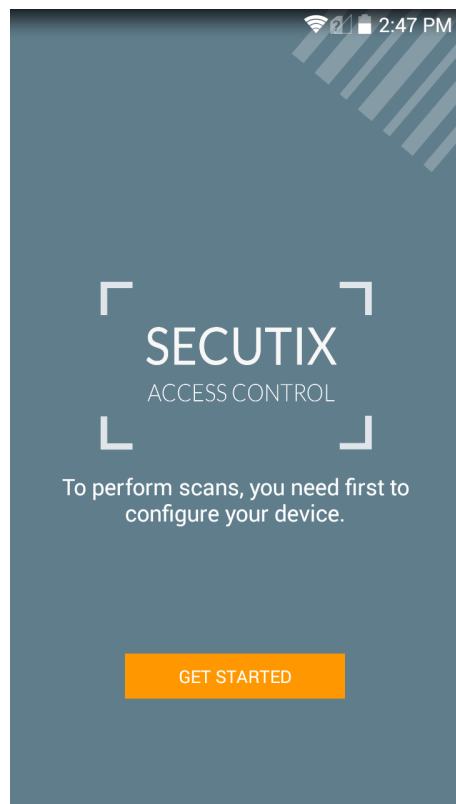


A continuación, introduzca el tipo de escáner (cámara del dispositivo o escáner láser; este último será el que se seleccione por teléfono), la orientación de las lecturas, el modo quiosco si es necesario y, finalmente, el código de acceso de 4 dígitos (seguridad para acceder a la pantalla de configuración).

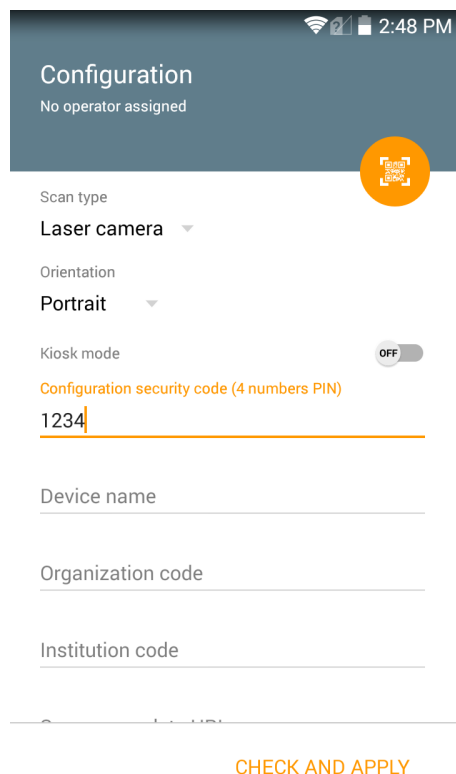The image shows a mobile application interface for 'Configuration'. At the top, there's a status bar with a Wi-Fi icon, a battery icon, and the time '2:48 PM'. The main screen has a dark blue header with the text 'Configuration' in white and 'No operator assigned' in smaller white text below it. To the right of the header is an orange circular icon with a white square frame. Below the header, there are several settings: 'Scan type' with a dropdown menu showing 'Laser camera'; 'Orientation' with a dropdown menu showing 'Portrait'; 'Kiosk mode' with a toggle switch set to 'OFF'; 'Configuration security code (4 numbers PIN)' with a text input field containing '1234'; 'Device name' with a text input field; 'Organization code' with a text input field; and 'Institution code' with a text input field. At the bottom of the screen, there is an orange button with the text 'CHECK AND APPLY' in white.

Por último, pulse la tecla naranja del margen superior derecho para escanear el código QR generado con anterioridad y, después, valide la configuración.

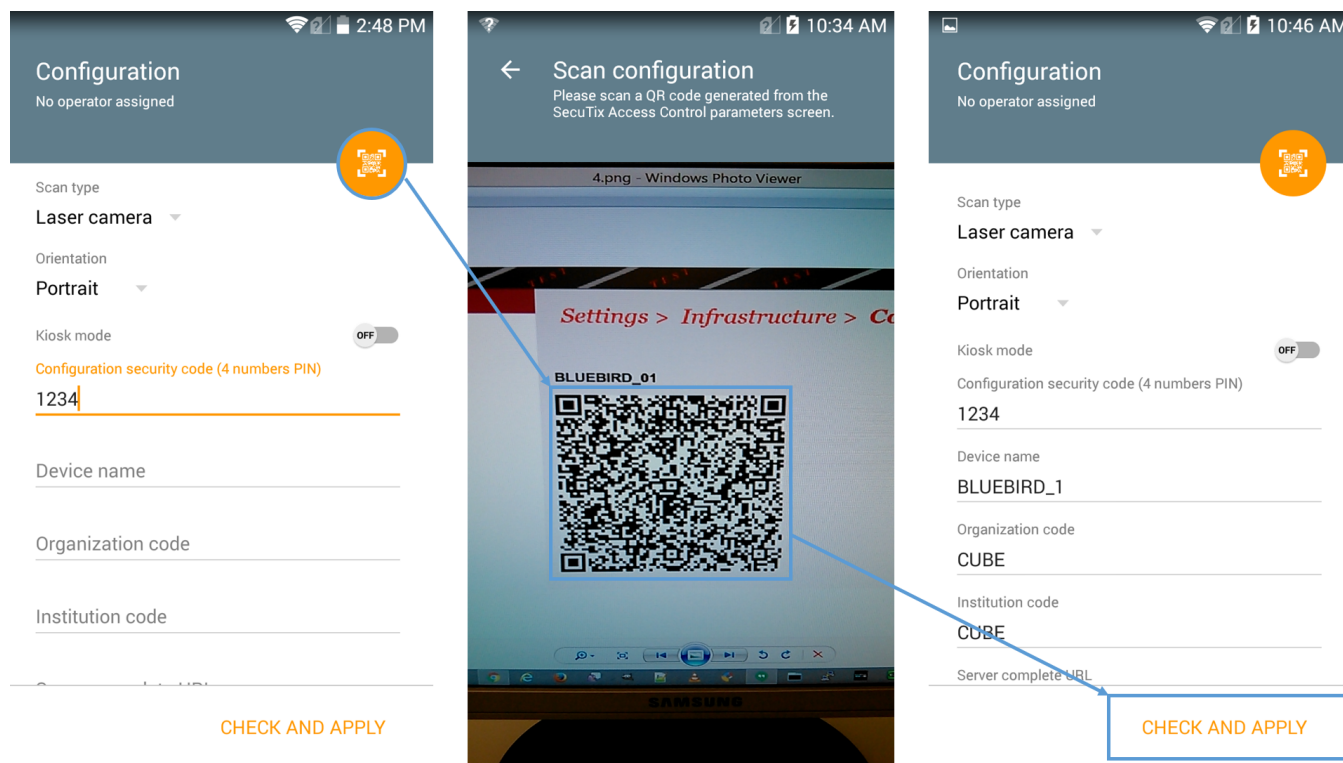

Si la configuración no fuese la correcta, le aparecerá el siguiente mensaje en la pantalla:

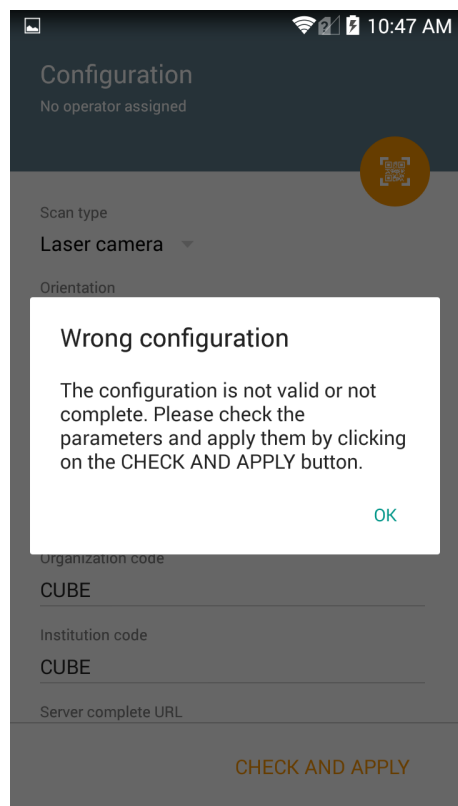

Si la configuración está correcta, le aparecerá el siguiente mensaje en la pantalla:

Configuration

Operator: STX_CPI

Portrait

Kiosk mode

Configuration security code (4 numbers PIN)

1234

CUBE

Server complete URL

os.secutix.com:443/tnac/external-remoting

Virtual operator username

CUBE_CUBE_PDA

Virtual operator password

10:51 AM

OK

CHECK AND APPLY